


Product data sheet

Characteristics

PDLO395-XW

Twin switched socket, PDL Iconic Outdoor,
horizontal, 10A 250V, Extra white

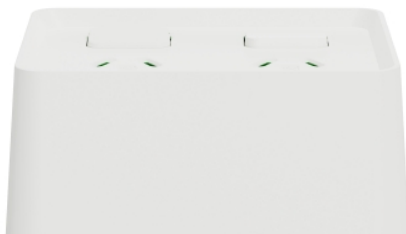

Main

Range	Iconic
Product or component type	Switched socket
Device presentation	Complete product
Product brand	PDL
Switch application	On/off switching
Outlet poles configuration	1P + E
Outlet standard	Australian

Complementary




Socket-outlet type	Twin switched socket-outlet
Control type	Rocker
Device mounting	Wall mounted
Mounting position	Horizontal
Number of power socket outlets	2
Number of rocker	2
Range compatibility	Iconic
Outlet standard description	With earthing contact
Outlet standard	Australian/New Zealand
Pin number	6
Fixing mode	By screw
Installation direction	Horizontal
Colour	White (XW)
Surface finish	Matt
Type of packing	Box
Sale per indivisible quantity	1
Rated current	10 A at 250 V AC 50 Hz
Electrical durability	12000 cycles
Connections - terminals	3 screw terminals
Screwdriver shape	Square drive no 1 (SQ1) Philips No 2
Clamping connection capacity	4 x 2.5 mm ² 4 x 4 mm ² 3 x 4 mm ²
Wire stripping length	16 mm
Material	PC (polycarbonate) ABS (acrylonitrile butadiene-styrene) POM (polyoxymethylene)
Type of installation	Outdoor
Height	85 mm
Width	115.5 mm
Depth	70 mm
Net weight	0.24 kg

The information provided in this documentation contains general descriptions and/or technical characteristics of the products of the company Schneider Electric. This information is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Environment

Ambient air temperature for storage	0...60 °C
Ambient air temperature for operation	0...45 °C
Relative humidity	10...95 %
Standards	AS/NZS 3112
Product certifications	RCM
IP degree of protection	IP54

Offer Sustainability

REACH Regulation	 REACH Declaration
EU RoHS Directive	Compliant  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration
Halogen content performance	Halogen free plastic parts product